



VR-90 P Coaxial Cable

CCTV CAMERA CABLE SERIES

NO.302511B/302511W/302513B/302515B

Construction:

Conductor	Material	Oxygen-free Annealed Copper
	Outside Diameter	0.643±0.01 mm
Insulation	Material	Solid PE
	Thickness	1.58mm
	Norm. Diameter	3.8±0.1mm
Shield	Material	Copper Clad Aluminum
	Braiding	16×6/0.12 mm
	Density	85%
Jacket	Material	PVC
	Diameter	6.15±0.1 mm
Power Wire	Color	Black
	Conductor	24×0.2mm CCA
	Diameter of PVC	2.0mm PVC

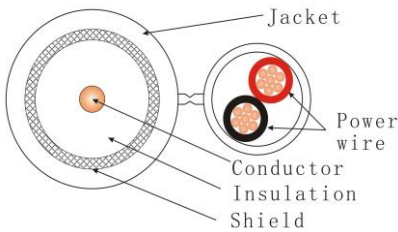

Electrical Characteristics:

Capacitance	67 ±3 pF/m
Impedance	75 +/- 3 Ω
Operating Temp Range (PVC)	-25 °C to 70°C
RoHS	YES

Attenuation(20°C):

Frequency (MHZ)	Max Attenuation (dB/100m)
50	8.20
100	15.00
200	19.60
400	26.10
800	35.80
1000	40.50

Order Informations:

Marking	ViOniX™ Batch No. VR-90P RG 59-96-0.75 75Ω V-AX CE/ISO9001-2000 ***M
Inner Package	100M/Plastic Spool, 300MWooden Spool,500M/Wooden Spool
Outer Package	Carton
More informations	ViOniX™